

## CORRECTED VERSION

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
11 March 2004 (11.03.2004)

PCT

(10) International Publication Number  
**WO 2004/020833 A1**

(51) International Patent Classification<sup>7</sup>: **F04C 29/08**

Paul, Maria [BE/BE]; Groenenborgerlaan 128, B-2610 Antwerp (BE). VANDEVOORDE, Manuel, Paula, Albert [BE/BE]; Nieuwstraat 13, B-2880 Bornem (BE).

(21) International Application Number:  
PCT/BE2003/000128

(74) Agent: DONNÉ, E.; Bureau M.F.J. Bockstael nv., Arenbergstraat 13, B-2000 Antwerpen (BE).

(22) International Filing Date: 24 July 2003 (24.07.2003)

(25) Filing Language: English

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(26) Publication Language: English

(30) Priority Data:  
2002/0505 29 August 2002 (29.08.2002) BE

(71) Applicant (*for all designated States except US*): ATLAS COPCO AIRPOWER, Naamloze Vennootschap [BE/BE]; Boomsesteenweg 957, B-2610 Wilrijk (BE).


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): BLOCK, Tom,

[Continued on next page]

(54) Title: INLET PIECE FOR A LIQUID-INJECTED COMPRESSOR ELEMENT

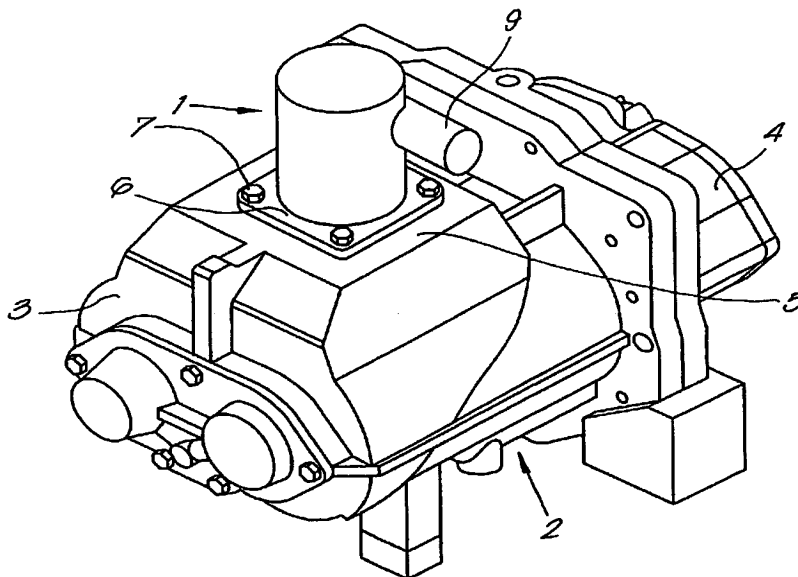

(57) Abstract: Inlet piece for a liquid-injected compressor element, characterized in that it comprises a sleeve (8) which consists of a casing (11), a bottom wall (12) provided with an opening (13) and a top wall (14) which is entirely tight, a pipe (9) opening on the inside of the sleeve (8) and a partition (10) comprising a span part (15) which spans the opening (13) in the aforesaid bottom wall (12) and which transforms into an inclosing part (16) reaching down to the bottom wall (13), whereby the partition (10) leaves a passage (18) on one side of the opening (13) and the pipe (9) opens in the sleeve (8) between the top wall (14) and the span part (15), such that, because of the partition (10), gas flowing from the opening (13) to the pipe (9) has to make among others a revolving movement.